RK026IHV066

REV.	DRG DATE	DESCRIPTION	DRAWN BY

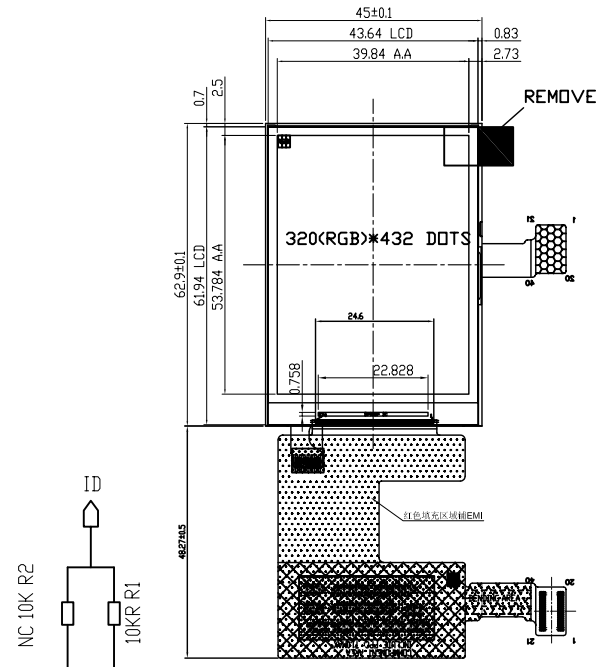

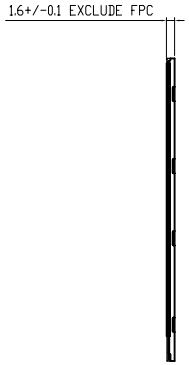

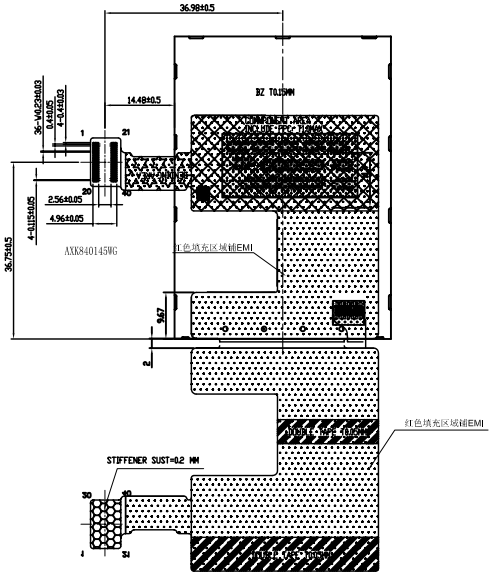



- Insulating tape covelement T0.06MM
- Commponent area include FPC T1.0max
- Electromagnetic membrane
- Doubie tape T0.05MM
- Bending area

Specification:

1. Viewing angle: ALL
2. Operating temp: -20°C~+70°C
3. Storage temp: -30°C~+80°C
4. LCD Driver IC: ILI9488
5. Backlight: 5 chip White LED
6. LCM BRIGHTNESS: 200 CD/M2(TYP)(BL 18mA/LED)
7. General Tolerance: ±0.2
8. ROHS Request

video mode

IF=5*18 mA



PIN	SYMBOL
1	LED2+
2	NC
3	LED5-
4	GND
5	GND
6	GND
7	LED1-
8	LED3-
9	LED1+
10	GND
11	GND
12	GND
13	DSI_D1P(NC)
14	DSI_D1N(NC)
15	GND
16	RESETB
17	PVSS
18	NC
19	VDD
20	VDD
21	NC
22	NC
23	NC
24	GND
25	GND
26	GND
27	LED4-
28	LED2-
29	NC
30	GND
31	GND
32	GND
33	DSI_DOP
34	DSI_DON
35	GND
36	DSI_CN
37	DSI_CP
38	GND
39	ID
40	VCCIO

DRG DATE	13.09.28	TITLE.	LCM OUTLINE	Rocktech Displays Limited			
CHECK	WELLING	MODEL.	RK026IHV066				
CHECK		DWG No.		REV.	UNIT	SIZE	(3)
APPROVE		PAGE	1 OF 1	2.0	mm	A4	

ROCKTECH

www.rocktech.com.hk