




Front View

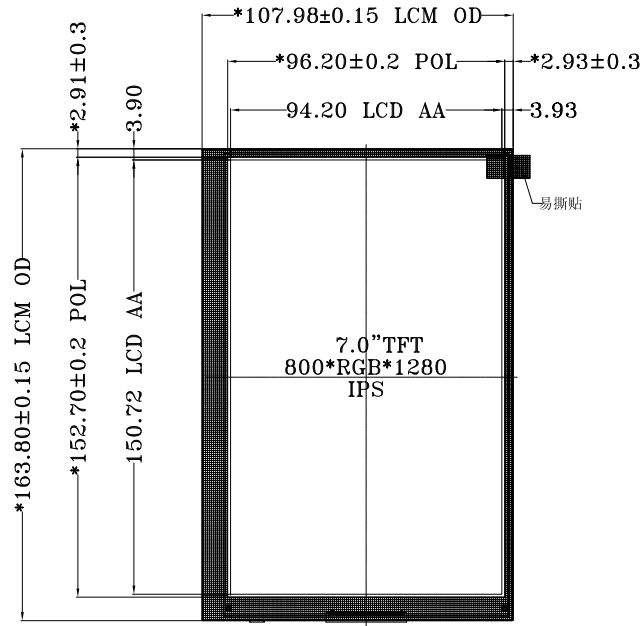

Side View

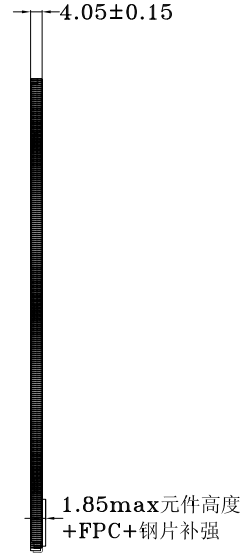


Dorsal View

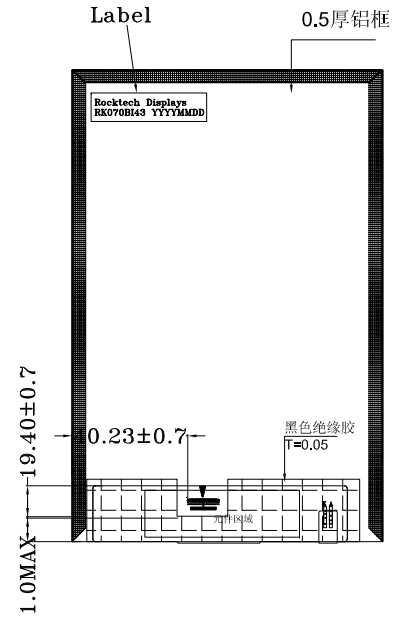

FPC折弯示意图
FPC Fold Shipment

| Pin | Name |
|-----|-------------|
| 1 | LEDA |
| 2 | LEDA |
| 3 | LEDA |
| 4 | LEDPWM |
| 5 | LEDK |
| 6 | LEDK |
| 7 | LEDK |
| 8 | LEDK |
| 9 | GND |
| 10 | GND |
| 11 | D2P |
| 12 | D2N |
| 13 | GND |
| 14 | D1P |
| 15 | D1N |
| 16 | GND |
| 17 | CLKP |
| 18 | CLKN |
| 19 | GND |
| 20 | D0P |
| 21 | D0N |
| 22 | GND |
| 23 | D3P |
| 24 | D3N |
| 25 | GND |
| 26 | ID(NC) |
| 27 | RESET |
| 28 | VDDIO(1.8V) |
| 29 | VDD(2.8V) |
| 30 | VDD2(2.8V) |
| 31 | VDD1(2.8V) |



LCM NOTES:

- DISPLAY TYPE: 7.0 INCH TFT /Normally Black
- BACKLIGHT: 45 CHIP WHITE LED, 3S15P
VF = 9.6±1.2V; IF = 300mA
- OPERATING TEMP: -20°C~+60°C
- STORAGE TEMP: -30°C~+70°C
- LCD IC: JD9366AB
- Luminance: 600 cd/m2(TYP)
- "(")reference dimension,"(*)critical dimension
- RoHS Compliant

| REV. | DATE | MODIFICATION |
|------|------------|--------------|
| 1.0 | 2020.05.29 | First Issue |

| | |
|--------------------------|-------------------------------|
| INTERFACE | MIPi Interface |
| | FPC Connector FH26-31S-0.3SHW |
| VIEWING DIRECTION | ALL |
| Gray Inversion DIRECTION | None |

| | | | |
|---------------------------|---------------------|---------------------------------|--------------|
| Rocktech Displays Limited | | | |
| Material code: | | PART NO. RK070BI43 | |
| DWN | Li Huang 2020.05.29 | REV. V1.0 | SHEET OF 1/1 |
| CHKD | Li Huang 2020.05.29 | TOLERANCE UNLESS SPECIFIED ±0.3 | |
| PROJECTION 3rd ANGLE | UNIT mm | SCALE | 1:1 |