
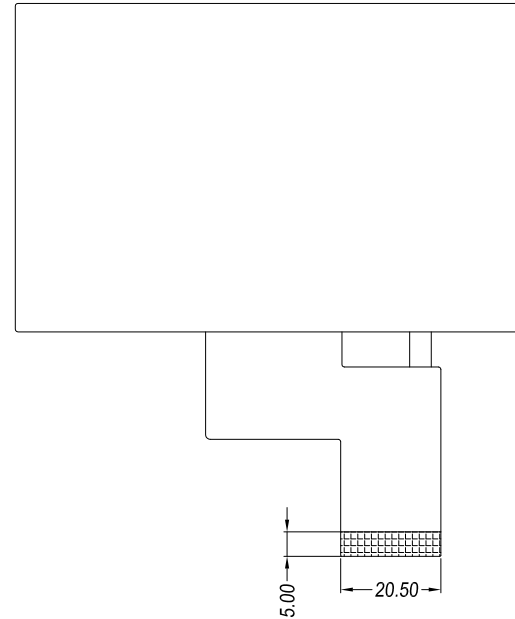
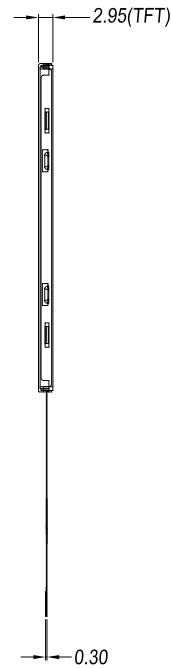



ISSUE	MODIFY DESCRIPTION	DATE
1.0	First Issue	2017.05.02

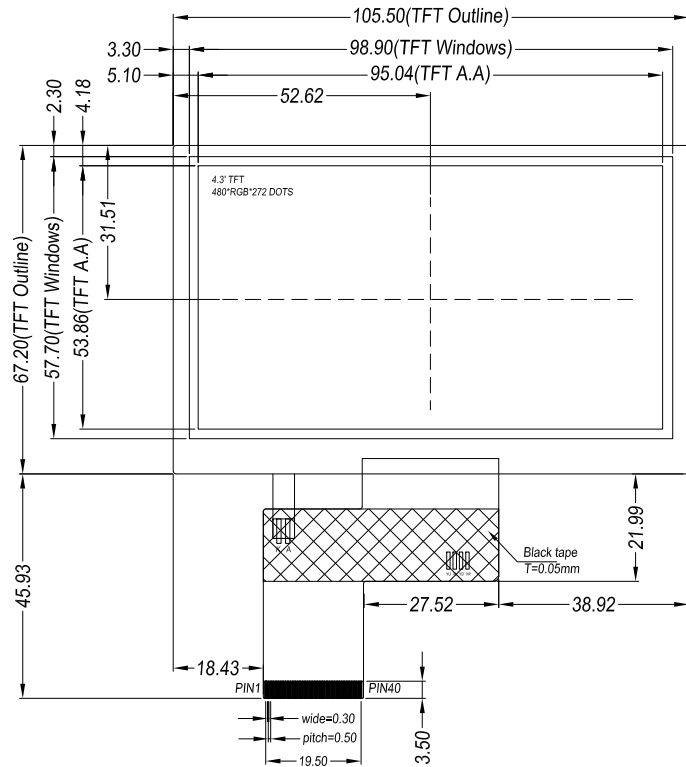

TFT ASSIGNMENT:

PIN	SYMBLE
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC(XR)
38	NC(YD)
39	NC(XL)
40	NC(YU)

Display Type	Transmissive, Normally White
Display Resolution	480(RGB)X272
Viewing Angle	12:00
LCD Controller/Driver	ST7282
LCD Driving Voltage	3.3V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Backlight Speciality	10PCS LEDS
Remark	All materials in the drawing comply with the ROHS

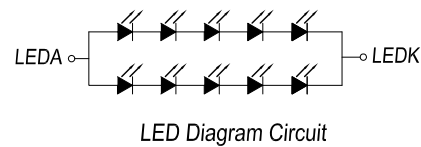

TITLE:		LCM Outline	
PROJECT NO:		RK043FN66HS	
DESCRIPTION:		4.3 Inch TFT	
GENERAL TOLERANCE: ±0.2			
Rocktech Displays Limited			
THIRD ANGLE PROJECTION			
	NAME	SIGN	DATE
DRAWN	Marvin Zhou		2017.05.02
CHECKED	Marvin Zhou		2017.05.02
REV: 1.0	UNIT: MM	SCALE: 1/1	SHEET: 1 OF 1