
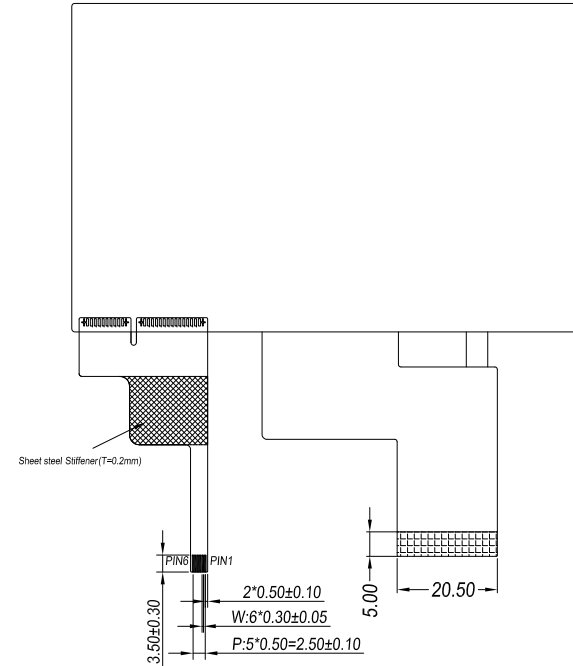
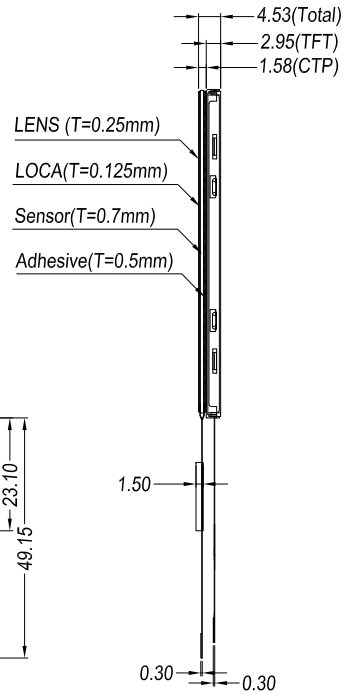


ISSUE	MODIFY DESCRIPTION	DATE
1.0	First Issue	2017.06.13

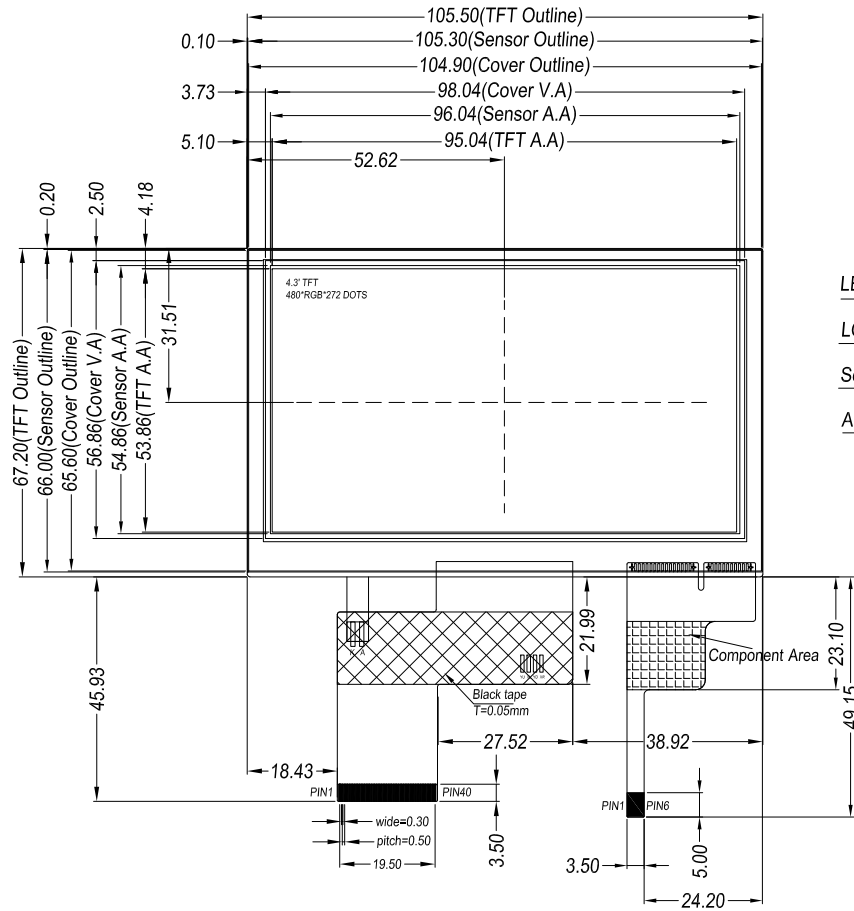


TFT ASSIGNMENT:

PIN	SYMBLE
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	RESET
38	INT
39	NC(XL)
40	NC(YD)

CTP ASSIGNMENT:

PIN	SYMBLE
1	VDD
2	RESET
3	INT
4	SCL
5	SDA
6	GND
35	NC
36	GND
37	NC(XR)
38	NC(YD)
39	NC(XL)
40	NC(YU)

Display Type	Transmissive, Normally White
Display Resolution	480(RGB)X272
Viewing Angle	12:00
LCD Controller/Driver	ST7282(TFT)+GT911(CTP)
LCD Driving Voltage	3.3V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Backlight Speciality	10PCS LEDS
Remark	All materials in the drawing comply with the ROHS

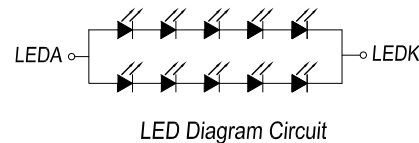

TITLE:		LCM Outline	
PROJECT NO:		RK043FN66HS-CTG	
DESCRIPTION:		4.3 Inch TFT and CTP	
GENERAL TOLERANCE: ±0.2			
<b>Rocktech Displays Limited</b>			
THIRD ANGLE PROJECTION			
	NAME	SIGN	DATE
DRAWN	Marvin Zhou		2017.06.13
CHECKED	Marvin Zhou		2017.06.13
REV: 1.0	UNIT: MM	SCALE: 1/1	SHEET: 1 OF 1