

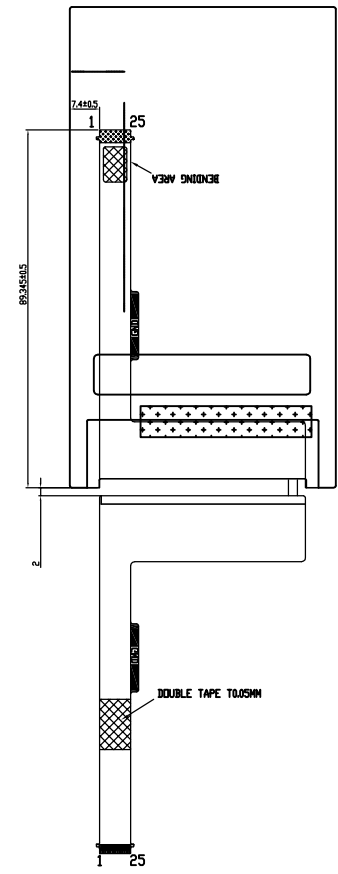
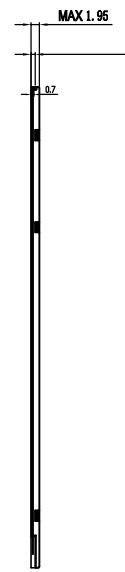
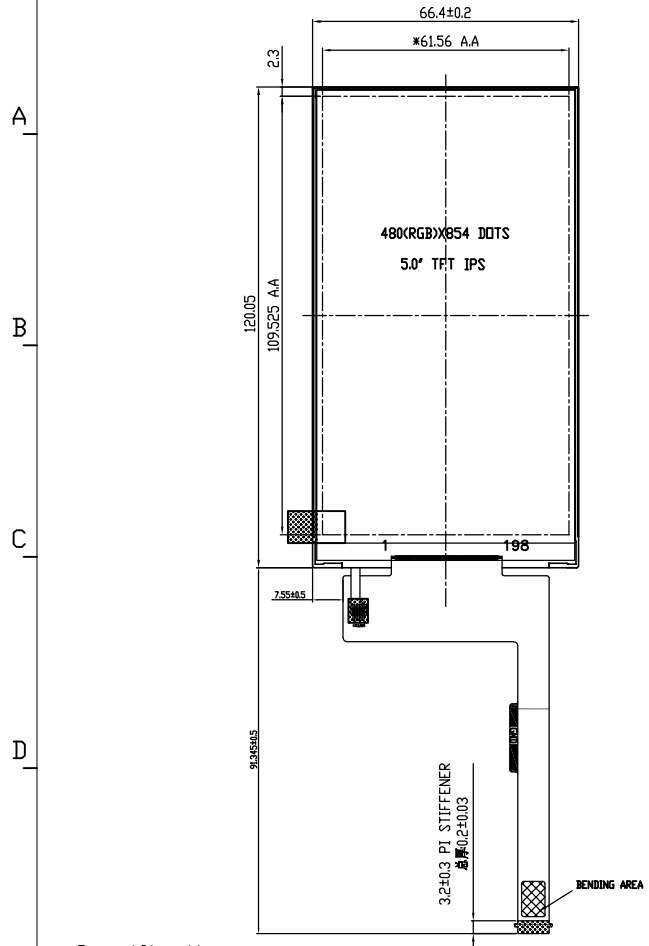


REV.	DRG DATE	DESCRIPTION	DRAWN BY
1.0	13.04.22		welling



No.	Pad Name
1	GND
2	MIPI_TDN2(NC)
3	MIPI_TDP2(NC)
4	GND
5	MIPI_TDPO
6	MIPI_TDN0
7	GND
8	MIPI_TDP1
9	MIPI_TDN1
10	GND
11	MIPI_TCP
12	MIPI_TCN
13	GND
14	MIPI_TDP3(NC)
15	MIPI_TDN3(NC)
16	GND
17	VIO18(1.8V)
18	LPTE
19	LRSTB
20	LED+
21	GND
22	LED-
23	LED-
24	GND
25	VIO28(2.8V)

- Specification:
1. Viewing angle: IPS
  2. Display mode: NORMALLY Black
  3. Operating temp: -20°C~+60°C
  4. Storage temp: -30°C~+70°C
  5. LCD Driver IC: IL19806E
  6. Backlight: 12 chip white LED
  7. General Tolerance: ±0.2
  8. ROHS Request



DRG DATE	14.12.23	TITLE	LCM OUTLINE	Rocktech Displays Limited			
CHECK	WELLING	MODEL	RK050BR045	REV.	UNIT	SIZE	(3)
CHECK		DWG No.		1.0	mm	A4	
APPROVE		PAGE	1 OF 1				