
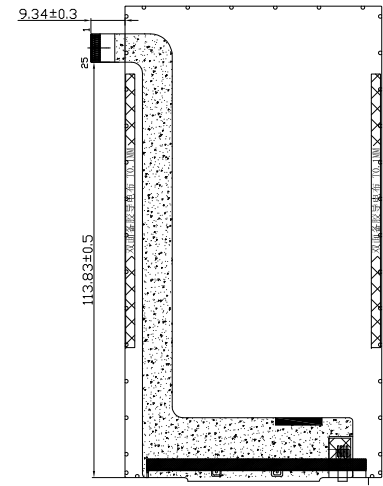
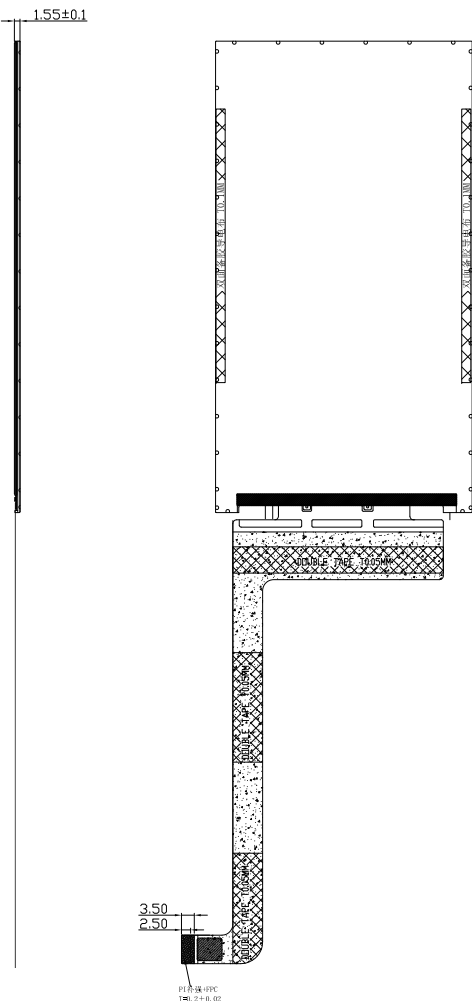


REV.	DRG DATE	DESCRIPTION	DRAWN BY
1.0	20190816	LCD及BL变更	LIGANG

A
B
C
D
E

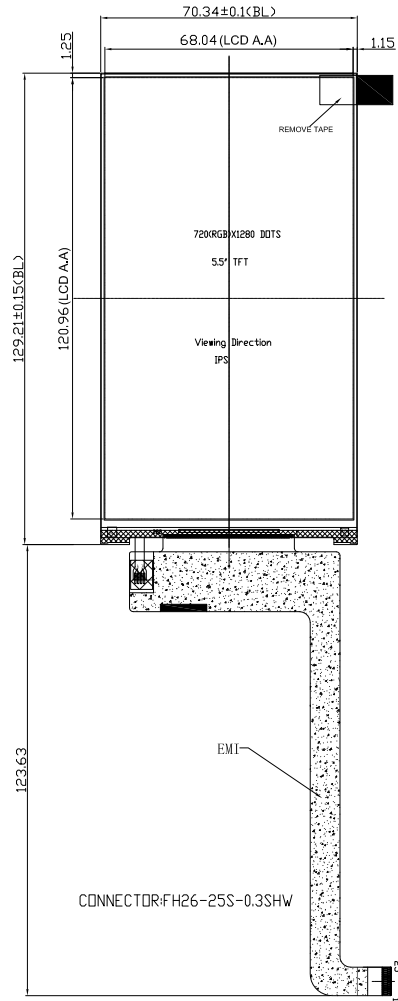



NO	Pad Name
1	LEDK
2	LEDA
3	NC
4	GND
5	TDN0
6	TDP0
7	GND
8	TDN1
9	TDP1
10	GND
11	TCN
12	TCP
13	GND
14	TDN2
15	TDP2
16	GND
17	TDN3
18	TDP3
19	GND
20	GND
21	LRSTB
22	LPTE
23	VCC 2.8
24	LCD_ID
25	IDVCC 1.8

CONNECTOR: FH26-25S-0.3SHW

EMI

Specification:

1. Viewing angle: FREE
2. Display mode: Normally Black
3. Operating temp: -20°C~+60°C
4. Storage temp: -30°C~+70°C
5. LCD Driver IC: RM68200
6. Backlight: 14 chip White LED
7. General Tolerance: ±0.2
8. ROHS Request

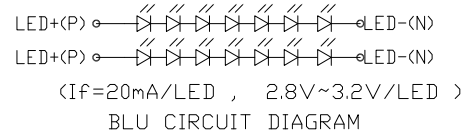

备注: LCM接口信息
不帶RAM
IC模式 仅支持MIPI-Video Mode

DRG DATE	19.08.29	TITLE	LCM OUTLINE	Rocktech Displays Limited			
CHECK	LIGANG	MODEL	RK055MH0099	REV.	UNIT	SIZE	(3)
CHECK		DWG No.			mm	A4	
APPROVE		PAGE	1 OF 1				