

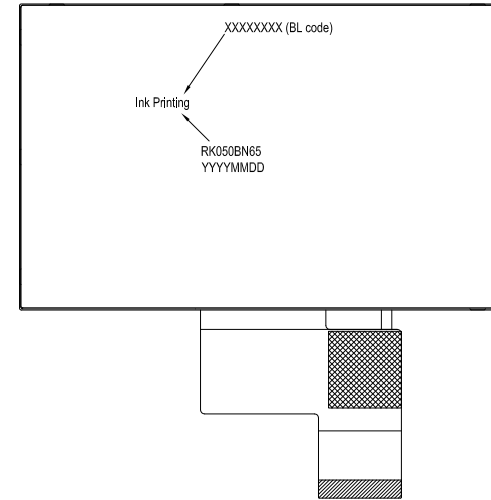

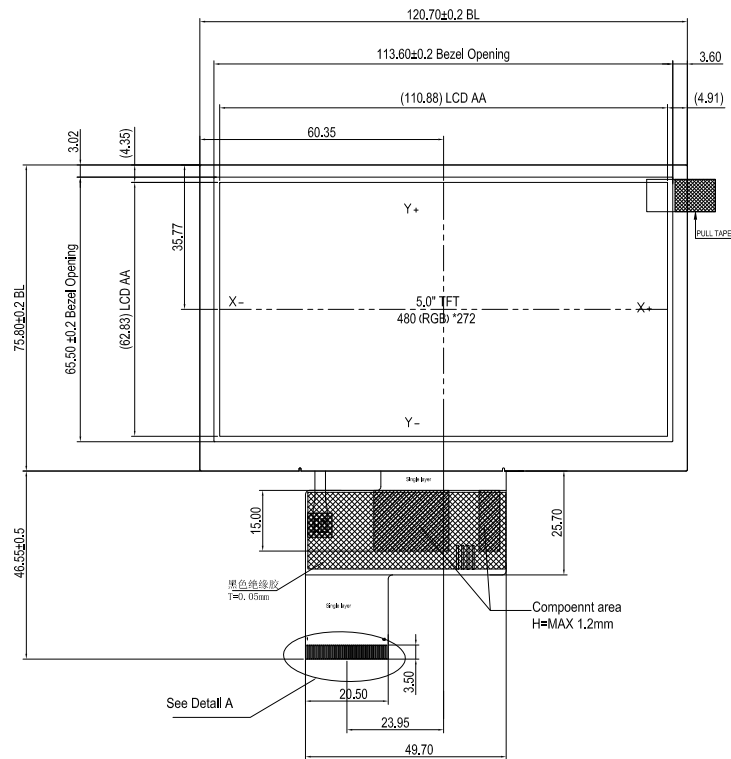


ISSUE	MODIFY DESCRIPTION	DATE
1.0	First Issue	2017.06.23




TFT ASSIGNMENT:

PIN	SYMBL
1	LEDK
2	LEDA
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	NC
33	NC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

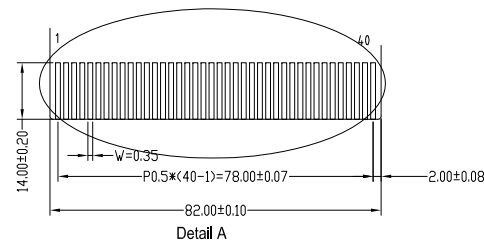

CIRCUIT DIAGRAM

Display Type	Transmissive, Normally White
Display Resolution	480(RGB)*272
Viewing Angle	12:00
LCD Controller/Driver	HX8257A-M
LCD Driving Voltage	3.3V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Backlight Speciality	LED Side(White, 12PCS DIES),Vf=19.2V,If=40mA
Remark	FPC Connector (FH12-40S-0.5SH) All materials in the drawing comply with the ROHS

TITLE:		LCM Outline	
PROJECT NO:		RK050BN65	
DESCRIPTION:		5.0 Inch TFT	
General Tolerance: ±0.2			
Rocktech Displays Limited			
 THIRD ANGLE PROJECTION			
	NAME	SIGN	DATE
DRAWN	Marvin Zhou		2017.06.23
CHECKED	Marvin Zhou		2017.06.23
REV: 1.0	UNIT: mm	SCALE:1/1	SHEET: 1 OF 1