
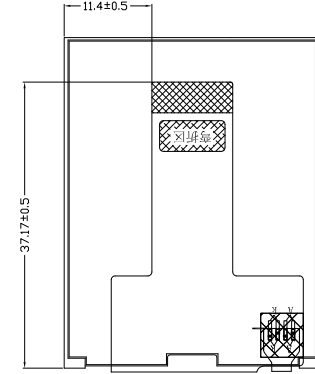
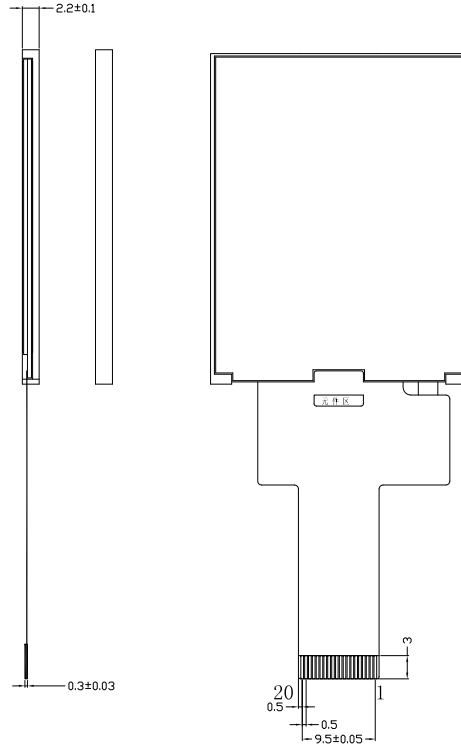


REV.	DRG DATE	DESCRIPTION	DRAWN BY
1.0	2017-8-18	First	LIGANG

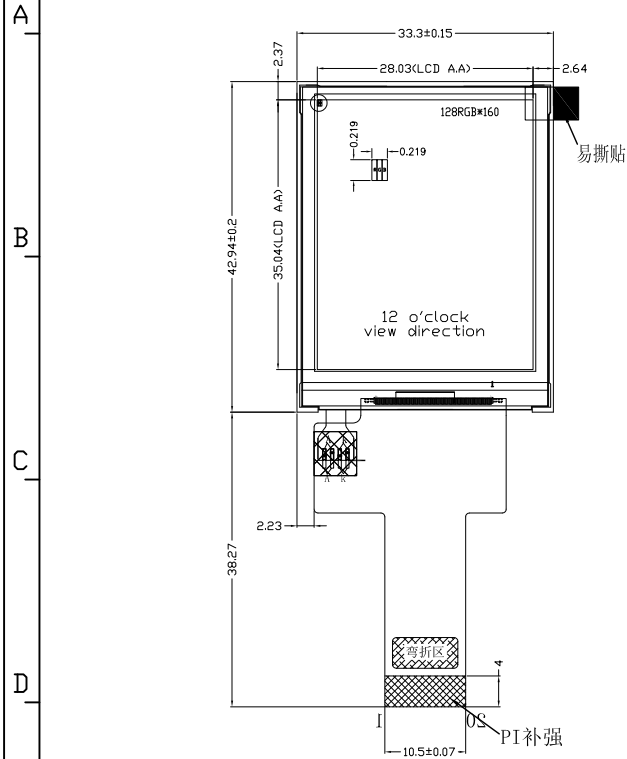

FPC弯折参考图


DESCRIPTION

PIN	SYMBOL
1	BL-K
2	BL-A
3	GND
4	VDD
5	VDDIO
6	IM2
7	CS
8	RST
9	RS
10	WR
11	RD
12	DB7
13	DB6
14	DB5
15	DB4
16	DB3
17	DB2
18	DB1
19	DB0
20	GND

Specification:

- 1). Viewing angle: 12:0' Clock
- 2). Display mode: 262K TFT/Transmissive/Normally White
- 3). Operating temp: -20°C~+60°C
- 4). Storage temp: -30°C~+70°C
- 5). LCD Driver IC:ST7735
- 6). Backlight: 2 chip White LED
- 7). General Tolerance: ±0.2
- 8). ROHS Request

LED Source (CIRCUIT DIAGRAM)



\* LCD靠上组装

DRG DATE	17.08.15	TITLE.	LCM OUTLINE	Rocktech Displays Limited			
CHECK	LIGANG	MODEL.	RK018SC053	REV.	UNIT	SIZE	(3)
CHECK		DWG No.		1.0	mm	A4	
APPROVE		PAGE	1 OF 1				