
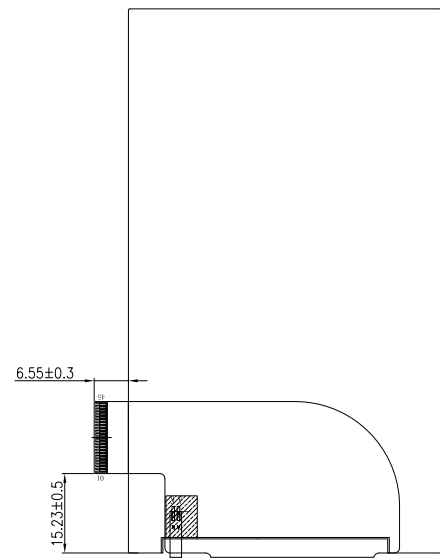
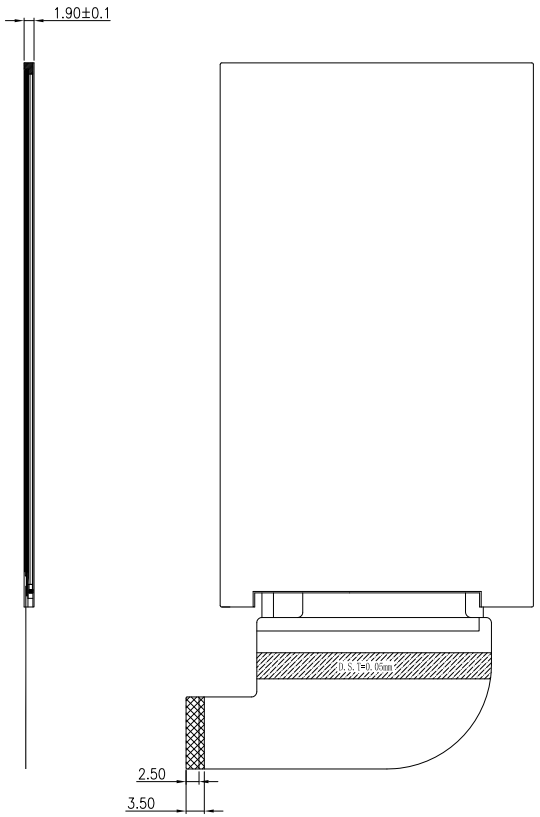



REV.	DRG DATE	DESCRIPTION	DRAWN BY
1.0			

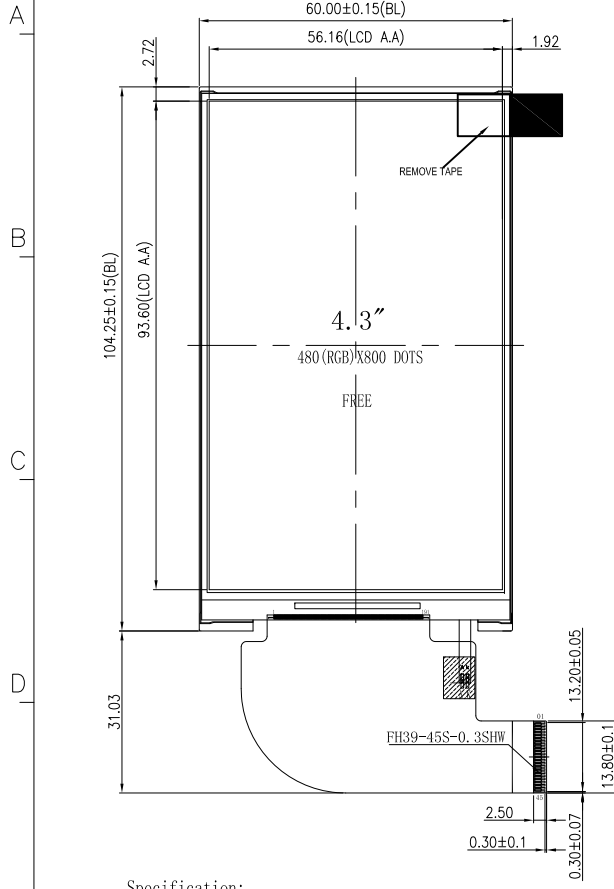

FPC弯折示意图  
弯折出货

1	LCM-ID
2	FMARK
3	SDI
4	NC
5	WR/SC1
6	NC
7	CS
8	RESET
9	NC
10	NC
11	GND
12	R7
13	R6
14	RS
15	R4
16	R3
17	R2
18	R1
19	R0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	B7
29	B6
30	B5
31	B4
32	B3
33	B2
34	B1
35	B0
36	DE
37	PCLK
38	HSYNC
39	VSYNC
40	IOVCC
41	VCC
42	GND
43	LEDK
44	LEDA
45	GND

- Specification:
- Viewing angle: FREE
  - Display mode: Normally Black
  - Operating temp: -20° C~+60° C
  - Storage temp: -30° C~+70° C
  - LCD Driver IC: ST7701S
  - Backlight: 10 chip White LED
  - General Tolerance: ±0.2
  - ROHS Request
  - 建议贴合的TP开窗尺寸为LCD AA尺寸长+0.3mm/宽+0.3mm;



If=40mA Vf=16V

DRG DATE	20200616	TITLE.	LCM OUTLINE	Rocktech Displays Limited			
CHECK	LIGANG	MODEL.	RK043BR077	REV.	UNIT	SIZE	(3)
CHECK		DWG No.			mm	A4	
APPROVE		PAGE	1 OF 1				